

Structure enhanced Least-squares migration by deep learning based structural preconditioning

Cheng Cheng*, Yang He, Bin Wang and Yi Huang (TGS)

Summary

Iterative data-domain least-squares migration can overcome acquisition limitations and recover the reflectivity for desired amplitudes and resolutions. However, migration noise due to velocity errors and multiple scattering energy related to strong contrasts in the velocity model can be erroneously enhanced as well. In this complex case, it needs many extra iterations to achieve the final desired image. Regularization or preconditioning can be applied at each least-squares iteration to suppress migration artifacts, speed up convergency and improve inversion efficiency. However, in sedimentary layers, without proper fault constraints, it cannot preserve the real geological features in the image. In this work, we propose to use convolutional neural networks (CNNs) to automatically detect faults on the migration image first, and then to use the picked fault information as an additional constraint for preconditioning during least-squares migration. With proper training, our 3D predictive model can learn to detect true fault features and avoid erroneous picks of swing noise on the validation dataset. An offshore Brazil field data example in the Santos Basin demonstrates that our final least-squares migration images show enhanced fault structure, minimized migration artifacts, significantly increased image bandwidth and improved illumination after only a few iterations.

Introduction

Many field data examples of data-domain least-squares migration (LSM) have shown that this method can overcome limitations of conventional depth migration, including limited image wavenumber content, biased illumination under complex geology and artifacts due to acquisition limitations (Wang et al., 2013). LSM estimates the reflectivity model by finding the best least-squares fit of the modeled data to the observed data, using gradient-based iterative methods. However, one cannot match all the complex features present in field data with only a linearized Born modeling operator. Without any constraints on the inversion gradient, the noise content will also increase with iterations. This increased noise mostly arises from velocity model error, a wider bandwidth of pre-existing linear noise in the data and back scattered energy due to the presence of strong contrasts in the velocity model (Wang et al., 2016). A successful inversion result requires many more iterations in this case in order to achieve the desired image with high signal-to-noise ratio. It is not efficient for production, especially when applied on high quality large scale projects which have strict turnaround time. The unacceptably high computational cost for attenuating these kinds of artifacts necessitates a preconditioning or regularization approach

that can help to attain a noise-free imaging result more efficiently. Many regularization approaches have been applied to impose constraints on the estimated gradient model, such as shaping regularization and dip filtering in the angle domain to reduce the effect of noise. These approaches work by imposing structure-enhancing filtering operators on the gradient to remove noise while preserving structural information like dipping faults. They essentially calculate semblance along various dips and can detect vertical discontinuities and linear faulting along features in the reflectivity, helping LSM to preserve this kind of information. However, in shallow sedimentary layers where fault planes are sharp and clear, without proper fault constraints these regularization operators may smooth through rather than preserve these geologic features in the image. To impose explicit constraints on fault planes during LSM, we propose to use convolutional neural networks (CNNs) to detect faults on the migration image first, and then to use the picked fault information as a weighting function built into the preconditioning scheme during LSM.

Methodology




Figure 1: Fault picking on synthetic validation examples. (a) input image for prediction, (b) fault prediction using pretrained model, (c) final model, and (d) true answers. The final trained model is generally better than the pretrained model in avoiding false picks on migration noise.

1. Fault picking based on deep learning:

Numerous methods have been proposed to detect faults by calculating attributes of seismic reflection continuity such as semblance and coherency (Wu, 2017). These seismic attributes, however, can be sensitive to noise and stratigraphic features. Machine learning is becoming more useful in seismic interpretation, with one of its most successful applications being for fault picking on seismic images. Most recently, some CNN methods have been introduced to detect faults by pixel-wise fault classification (fault or non-fault) with multiple seismic attributes (Wu et al., 2019). Here we follow the work of Wu et al., which considers fault detection as an efficient end-to-end binary image segmentation problem by using CNNs. It generates accurate fault likelihood maps on real datasets by using multiple powerful CNN architectures to obtain superior segmentation results. We use an efficient end-to-end CNN,

Structure enhanced Least-squares migration by deep learning based structural preconditioning

simplified from U-Net (Ronneberger et al., 2015) and a balanced cross-entropy loss function for optimizing the parameters of the CNN model. Also, to avoid tedious work and obtain a large set of learning data, we use their approach to generate 3D synthetic seismic images and corresponding fault interpretations by randomly choosing a combination of parameters plus artificial noise to train and validate the neural network.

We train our CNN model in two steps. First, we repeat the procedure of Wu et al. by training and validating with 200 and 20 pairs of synthetic seismic and fault images with only random noise added on, respectively. The resulting CNN model cannot distinguish between faults and migration swings when only random noise is added to a field dataset which is heavily contaminated by cross-line migration swings. Since Tensorflow and Keras allow for continued training based on a pre-loaded model, we next added migration swings to each synthetic image. Starting from the previous pretrained CNN model we continue the training process until the training and validation accuracy converges. The CNN model we obtain from this second training step performs better than the pretrained model in distinguishing faults from migration swings, for both synthetic (Figure 1) and real datasets (Figures 2, 4). As in Wu et al. (2019) the training samples turned out to be sufficient to train a good CNN model for our fault detection needs.

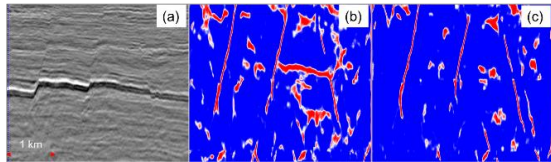


Figure 2: Fault interpretation on real data migration: (a) input image for prediction, (b) fault likelihood prediction using the pretrained model, and (c) the final model. On real data, the final trained model also performs better than the pretrained model in avoiding false picks on migration noise

2. Preconditioning Least-Squares Migration with structure constraint

The objective function of preconditioned LSM can be expressed as:

$$f(\bar{m}) = \min_{\bar{m}} \|\bar{d} - AS^{-1}S\bar{m}\|^2$$

where $f(\bar{m})$ stands for the cost function to be minimized, A is the linearized Born modeling operator which is the exact adjoint of the migration operator and S is a preconditioning operator. In this study, an acoustic one-way wave-equation operator and its adjoint are used.

We adopt structure-oriented smoothing with edge-preservation as preconditioning (Hale, 2009) in LSM to suppress migration artifacts caused by irregular sampling or overfitting to the data noise:

$$g'(\bar{x}) - \frac{\sigma}{2} \nabla \cdot D(\bar{x}) \cdot \nabla g'(\bar{x}) = g(\bar{x})$$

while $D(\bar{x})$ is tensor-valued filter coefficients, $g(\bar{x})$ is the raw gradient and $g'(\bar{x})$ is the structure smoothed gradient. The tensors $D(\bar{x})$ can be scaled by any measure of coherence that is almost zero near discontinuities and almost one where features are most coherent to preserve edges while smoothing. We calculate the semblance based on structural tensors and it is imposed as a smoothing weight. This allows us to impose fault likelihood as an additional constraint during inversion.

Field data demonstration

We demonstrate our least-squares migration algorithm with a field data example in Santos Basin, offshore Brazil. This is a narrow azimuth dataset (NAZ), acquired with 10 cables, 100 m streamer separation and 8 km streamer length. The input data underwent a typical processing flow involving denoise, deghost, demultiple and velocity model building steps. Although this achieves an overall significant improvement over the legacy data, pre-salt and supra-salt images in this area still suffer from uneven illumination, visible migration artifacts, and sub-optimal resolution. We

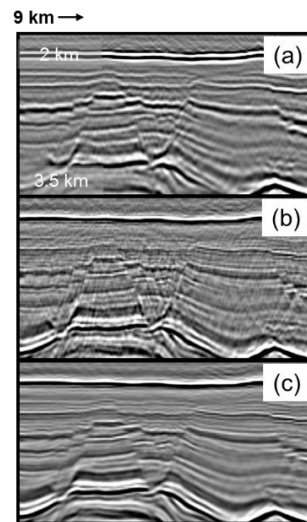


Figure 3: Inline image for Santos Basin field data examples: (a) conventional migration, (b) LSM at 5th iteration without any preconditioning or regularization, (c) LSM with conventional structure smoothing at 5th iteration.

Structure enhanced Least-squares migration by deep learning based structural preconditioning

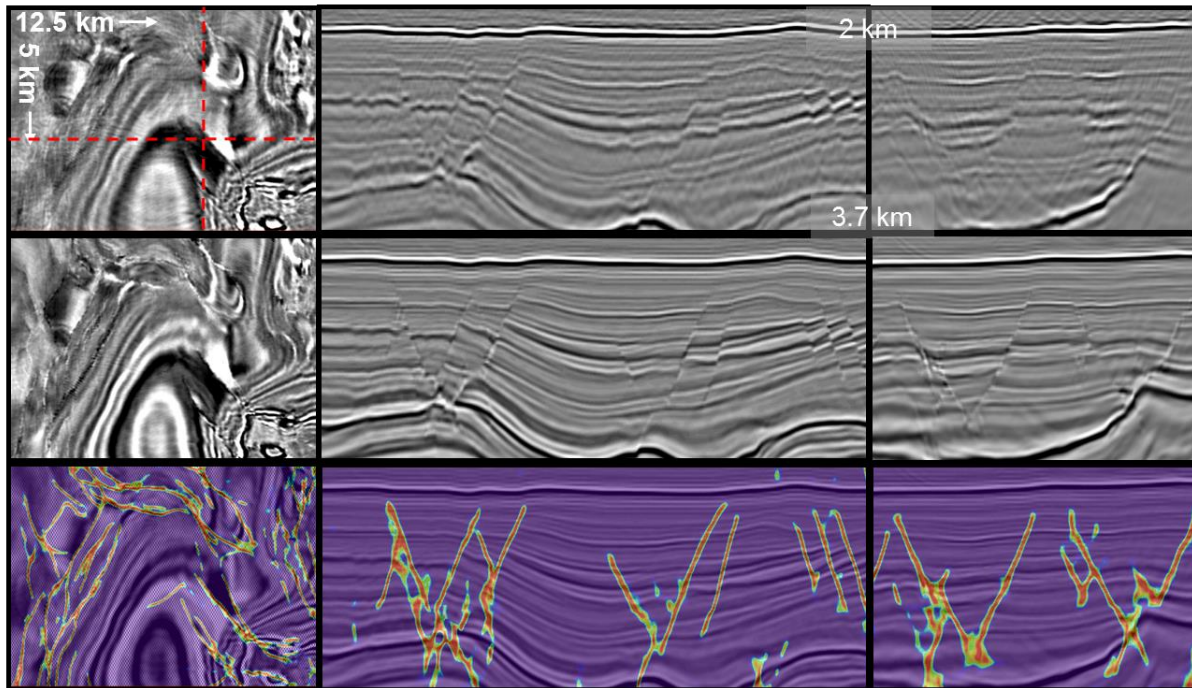


Figure 4: Santos Basin field data examples: The top row is the conventional migration to 25Hz; the middle row shows the final structure-constrained LSM image at 5th iteration; the bottom row shows machine-picked fault probability. Left column figures show map view while middle column shows inline view and right column shows crossline view. The inline and crossline positions are indicated on first figure.

show our least-squares image improvement in both shallow sediment layers and subsalt structures.

1. Shallow sediment structure enhancement:

Figure 3b shows LSM without any preconditioning or regularization constraints at iteration 5. Compared to the conventional migration (Figure 3a), LSM shows better events continuity, more balanced illumination and higher resolution. However, it also boosts noise content and migration artifacts that are likely caused by overfitting of some events that were present in the input data but could not be correctly modeled by acoustic Born modeling. Figure 3c shows LSM with traditional structural smoothing added during inversion, which generally removes the noise but also sacrifices the spatial resolution on dipping events and fault plane interpretability.

As shown in Figures 4, our deep learning structure-constrained least-squares technique helps resolve these problems, and the final image is better suited to reservoir characterization. Middle and right columns of Figure 4 show the comparison between the final LSM image at iteration 5 and conventional migration in inline and crossline directions. With automatic machine-picked fault probability

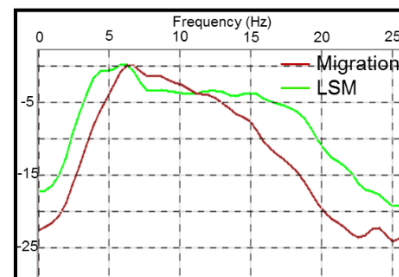


Figure 5: Spectrum comparison between migration and least-squares migration for seismic volume shown in Fig.2.

(last row in Fig. 4) imposed as the smooth weighting during structure-oriented smoothing, the final result shows all the benefits of conventional LSM without boosting overfitting noise. Compared with conventional smoothing preconditioning, our LSM results in higher lateral resolution and clearer, sharper dipping fault planes in the sediment layer. Left column of Figure 4 shows the depth slice comparison at around 2.8 km in the same volume. It clearly indicates an enhancement in imaging the fault planes and improving spatial resolution, which is also quantified by the spectrum comparison in Figure 5.

Structure enhanced Least-squares migration by deep learning based structural preconditioning

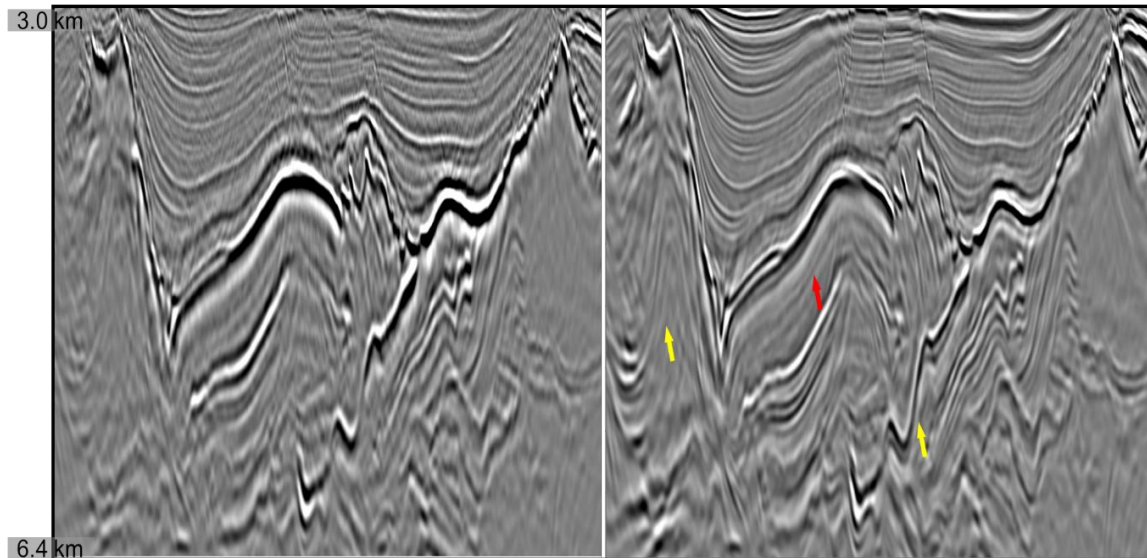


Figure 6: Santos Basin field data examples: The left figure is the conventional migration with frequency up to 31 Hz; the right figure shows the final structure-constrained LSM image at 5th iteration.

2. Image enhancement under complex overhang:

We further demonstrate our least-squares algorithm under complex overhang by showing another inline result. Figure 6 shows results of the original migration and least-squares migration results from sediments, top-salt to subsalt, pre-salt imaging region. Besides the enhanced faults and sediment layers shown in last section, the subsalt image quality is significantly improved with wider frequency-wavenumber band, more coherent sub-salt events and less migration noise in pre-salt layers. Specifically, red arrow shows the event right below the top-salt stands out since the resolution increased and the noise reduced; yellow arrow shows dipping events inside salt which are not clear or broken in the migration image become coherent.

Conclusion

Many applications of machine learning in seismic processing have shown that this technique is useful in geological feature characterization, such as fault and salt interpretation. Our work here demonstrates that it is valuable and efficient not only in interpretation but also during image processing itself. The data-domain LSM is an iterative inversion process which needs further constraints to converge to the most geologically sensible solution. We illustrated that combining machine learning constraints and

conventional smoothing based preconditioning can continue to improve the algorithm's results and bring LSM closer to its full potential. The current trained fault prediction model can make accurate picks even on noisy field seismic data, and the CNN model accuracy can be further improved to help fault interpretation.

With our advanced deep learning structure-constrained LSM algorithm, improved imaging of sedimentary geometries and higher accuracy of fault patterns can be achieved within fewer than 5 iterations for most field data cases. The final least-squares migration images with Santos Basin field dataset also show enhanced fault structure, minimized migration artifacts, significantly increased image resolution and improved illumination. Modern advanced imaging techniques like FWI and LSM are required to run within limited production time for high quality large-scale multi-client projects. With help from machine learning, our highly efficient and automated LSM technique makes it feasible.

Acknowledgements

The authors would like to thank TGS management for permission to publish this paper. We also thank Yao Zhao for pre-processing the shown real data examples. A special thanks to Guy Hilburn and Sarah Spoor for proofreading this abstract.

REFERENCES

- Wang, B., S. Dong, and S. Suh, 2013, Practical aspects of least-squares reverse time migration: 75th Conference and Exhibition, EAGE, Extended Abstracts, doi: <https://doi.org/10.3997/2214-4609.20131000>.
- Wu, X., 2017, Directional structure-tensor based coherence to detect seismic faults and channels: *Geophysics*, **82**, A13–A17, doi: <https://doi.org/10.1190/geo2016-0473.1>.
- Wu, X., L. Liang, Y. Shi, and S. Fomel, 2019, FaultSeg3D: using synthetic datasets to train an end-to-end convolutional neural network for 3D seismic fault segmentation: *Geophysics*, 1–36, doi: <https://doi.org/10.1190/geo2018-0646.1>.
- Hale, D., 2009, Structure-oriented smoothing and semblance: CWP Report, 635.
- Ronneberger, O., P. Fischer, and T. Brox, 2015, U-net: Convolutional networks for biomedical image segmentation: International Conference on Medical image computing and computer-assisted intervention, Springer, 234–241.